


## Technical product information

### VITOLEN Abstandhalter

The product consists of a PE foam equipped with a pressure sensitive acrylic adhesive on polyester film.

## Product composition

Carrier, PE foam, white  
Laminating adhesive, acrylic  
Subcarrier, PET film  
Adhesive, acrylic, low adherent  
Liner, siliconised paper, white

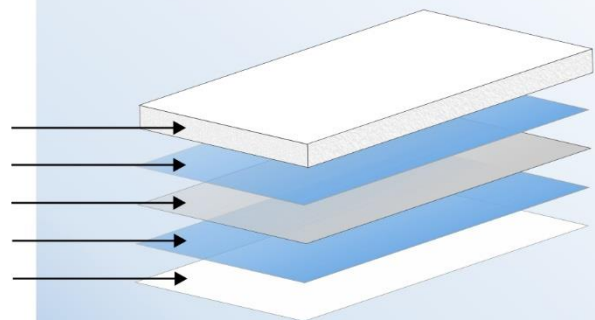

## Application

VITOLEN Abstandhalter are used as distance pads on different surfaces like wood, PVC, glass and metall.

## Product benefits

- ensure a defined distance
- residue-free removable

## Technical data and product properties

foam density (DIN EN ISO 845)		33 ± 5 kg/m <sup>3</sup>
thickness		10 mm or 15 mm
compression set 22 h at 23 °C and 25 % compression (DIN EN ISO 1856)	0.5 h after discharge 24 h after discharge	≤ 15 % ≤ 7 %
compression at (DIN EN ISO 3386)	10 % 25 % 50 %	> 32 kPa > 48 kPa > 98 kPa
shore-hardness 00		> 38
temperature resistance		-40 °C to 90 °C

## Processing

The most important processing parameters and information on cleaning are listed in our Information on Processing Adhesive Tapes.

## Storage and shelf life

12 month after receipt of goods, when stored at room temperature and 60 % relative humidity protected from sunlight, in original packaging.

## Special Information

The data and technical information presented are characteristic or average data. All advices are given to the best of our knowledge. You are kindly requested to conduct your own tests to determine the suitability of our product for your application. Our General Conditions answer any questions on guarantees and liabilities for these products unless other legal regulations apply.

If you need further information about product safety, conformance, REACH or RoHS please send your e-mail to [info@vito-irmen.de](mailto:info@vito-irmen.de)

07/2015 Fi